

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01K 1/22	A1	(11) International Publication Number: WO 98/50942 (43) International Publication Date: 12 November 1998 (12.11.98)
(21) International Application Number: PCT/IB98/00668 (22) International Filing Date: 4 May 1998 (04.05.98) (30) Priority Data: 97201348.6 6 May 1997 (06.05.97) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for DE only): PHILIPS PATENTVERWALTUNG GMBH [DE/DE]; Röntgenstraße 24, D-22335 Hamburg (DE). (71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): BRÜGGEMANN, Ursula [DE/FR]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). KOHLMANN, Wilfried, Ludwig [DE/DE]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). GEBOERS, Jacques, Maria, Jozef [BE/FR]; Prof. Holstlaan 6, NL-5656 AA		Eindhoven (NL). VAN HEES, Antonius, Johannes, Maria [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: EVERS, Johannes, H., M.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL). (81) Designated States: CN, JP, KR, PL, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: ELECTRIC INCANDESCENT LAMP

(57) Abstract

The electric incandescent lamp has a sintered glass plate (1) through which current conductors (2) and a metal tube (3) extend. An incandescent body (4) is connected to said current conductors (2) aligned with respect to the plate (1). A glass bulb (5) is present over the incandescent body (4), gastight secured to the plate (1) by means of enamel (6). A water getter (20) and a heavy gas at an elevated pressure are present inside the glass bulb (5). The lamp may consume a relatively high power and may be relatively small, but nevertheless has a relatively long life.

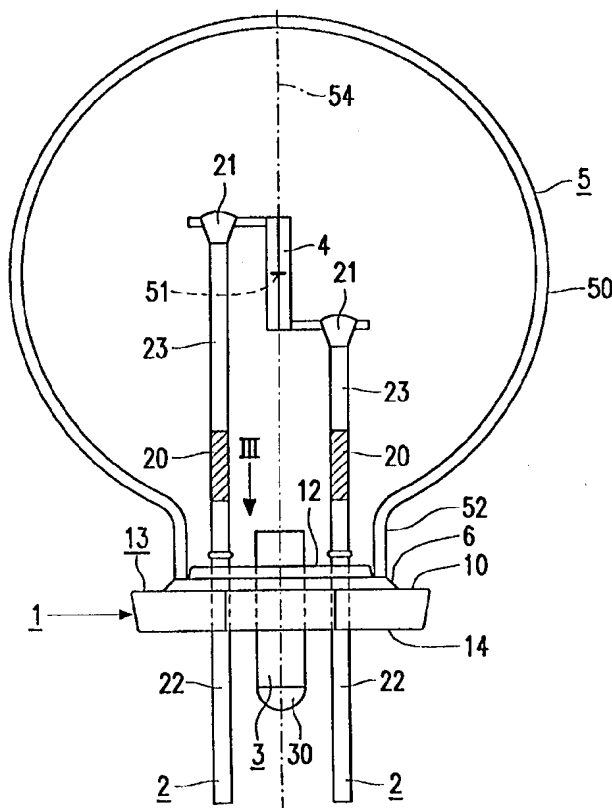

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Electric incandescent lamp

Description

The invention relates to an electric incandescent lamp comprising:

- 5 a moulded glass plate which is connected in a gastight manner to current conductors and to a metal tube which extend through said plate;
- an incandescent body occupying a predetermined position relative to the moulded plate and connected to the current conductors;
- a glass bulb around the incandescent body, connected in a gastight manner to the moulded plate by means of enamel;
- 10 a filling gas having a pressure of at least 1 bar inside the bulb, said metal tube having a gastight seal outside the bulb.

Such an electric incandescent lamp is known from FR-B-913,579.

- The known lamp has a moulded or pressed glass plate with a circular
- 15 edge with a locating stud thereon. The lamp is designed for being passed with its bulb in front through an opening in a reflector and for being pressed home with the edge of the plate against a boundary of said opening. The reflector with the lamp may be used as a motor vehicle headlamp for generating a passing beam and a driving beam.

- It is a disadvantage of the known electric lamp that the glass plate can
- 20 only be manufactured with wide dimensional tolerances. This means that the position of the incandescent body is also badly defined.

- It is desirable in other applications of incandescent lamps, for example at the rear of vehicles such as motor cars, to have available electric incandescent lamps which can be moved backwards, i.e. with a lamp cap or base in front, against a carrier, and whose
- 25 incandescent body then occupies an accurately defined position relative to this carrier with the bulb facing away from the carrier. Such lamps may be used for the stop light, the tail light, the reversing light, the rear fog lamp, the indicator lights, etc.

Known electric incandescent lamps for these functions are provided with lamp caps. The incandescent body thereof has a position which is defined within no more

than wide limits relative to said lamp cap, and the lamps have a comparatively short life. In addition, there is a comparatively high early failure rate owing to lamp leaks.

5 It is an object of the invention to provide an electric incandescent lamp of the kind described in the opening paragraph which renders possible an accurate, predetermined position of the incandescent body relative to the glass plate as well as a compact construction.

According to the invention, this object is achieved in that the glass plate is a sintered body which has a composition which corresponds to the composition of the glass
10 of the bulb.

The sintered glass plate can be manufactured to a high dimensional accuracy. The current conductors and the metal tube may be present right from the start and may be passed through the glass in a gastight manner in that case. The sintered glass plate has the further advantage that it has a light color, for example white or a pale grey, so that it
15 reflects incident light. It is prevented thereby that the light incident thereon is lost to the light beam which may be formed by means of a reflector. The correspondence in glass compositions avoids glass strain.

The lamp has a comparatively long life thanks to the filling gas pressure above 1 bar. It is favorable to choose the pressure of the filling gas at room temperature to
20 lie between 2 and 15, in general between 2 and 8 bar, for example between 3 and 5 bar. It is furthermore favorable for lamp life and also for counteracting a decrease in the luminous flux of the lamp caused by blackening of the bulb owing to deposits of tungsten evaporated from the incandescent body when the filling gas comprises Xe, Kr, or a mixture thereof, for example in the ratio in which they are present in the air, i.e. approximately 6% Xe by
25 volume. The evaporation of tungsten is strongly hampered by the high molecular weight of these gases and by their pressure, so that it is possible to use a comparatively small bulb while achieving a high luminous maintenance. This renders it possible to give the lamp a very small constructional height, so that luminaires in which the lamp will be accommodated may be comparatively flat. The lamp may have, for example, a dimension of less than 2 cm
30 from the outside of the glass plate to the top of the bulb.

It may be favorable for the filling gas to comprise a few % of N₂ by volume for preventing breakdown, for example in the case of a comparatively high burning voltage, for example of 24 V or more. It may also be favorable to add a halogen or halogen compound to the filling gas so as to prevent blackening of the bulb.

In a favorable embodiment, a water vapor getter is present in the bulb. The water vapor getter may be provided on the glass plate or against a current conductor, but a particularly convenient getter is formed by a coating on at least one of the current conductors. The water vapor getter renders it possible to heat the bulb and the plate to a comparatively high temperature and thus to dissipate comparatively high powers in a comparatively small bulb. The lamp is accordingly capable of dissipating powers of up to approximately 25 W at said small dimensions. Water vapor released from the glass is bound by the getter, so that it is prevented that a water vapor cycle will arise in the lamp, transporting tungsten from the incandescent body to the plate and to the bulb wall.

It is attractive if the closure of the metal tube is a solidified molten metal. It is possible in that case to seal off lamps in a clean atmosphere, for example in a gastight chamber, for example by means of a laser. Another possibility is that a drop of metal is deposited, for example of tungsten, whereby, for example, a TIG weld is obtained. These methods of providing gastight seals have the advantage that they can be realized quickly and are very reliable. A metal tube has the advantage that it and its seal are not very vulnerable, and that the tube can be sealed off while strain therein is avoided.

In a favorable embodiment, the incandescent body is connected to the current conductors by means of a solidified molten metal. This embodiment not only has the advantage over alternative embodiments, such as pinches or resistance welds, that it can be quickly realized and is reliable, but also that it is accurate. The incandescent body may be brought into an accurate, previously defined position relative to the sintered plate in that case, preferably relative to an outer surface thereof facing away from the bulb, ends of the incandescent body being moved to adjacent the current conductors, and not necessarily against them. In the latter case, the molten metal bridges the gap between the current conductors and the ends of the incandescent body, interconnecting the two by its solidification. The molten metal may be provided from the exterior, for example molybdenum, for example through a dispenser, in the so-called drop deposition process, but alternatively the current conductor itself may be made to melt, for example by means of a laser, beyond the end of the incandescent body as seen from the plate.

In a favorable embodiment, the current conductors each have a weld adjacent the plate between a first conductor part which is made from a first metal and which enters the bulb through the moulded plate and a second part made from a second metal which extends towards the incandescent body. This embodiment has the advantage that the second part may be provided, for example by means of a butt weld, after the plate has been

manufactured. The second part in that case is not exposed to the temperatures necessary for manufacturing the plate and may accordingly have a greater rigidity than the first part, given the same thickness, because it has not been soft-annealed. An important advantage of this is that this embodiment affords a wide freedom of choice. Thus the second part may be chosen, for example, to have a comparatively small diameter so as to prevent this part from forming a shadow in the generated light beam.

It is favorable when the bulb has a spherical end portion having a center of curvature and connected via a cylindrical portion to the moulded plate by means of enamel, while the incandescent body surrounds the center of curvature. The incandescent body is usually arranged transversely to the sintered plate on a centerline of the bulb. In a favorable embodiment, the cylindrical portion and an adjoining portion of the end portion have a white, diffusely scattering coating. This embodiment has the advantage that the coating reflects the generated light in a direction away from the plate, and also that a carrier retaining the lamp may be manufactured from a material of low heat resistance because the coating also reflects thermal radiation.

It is alternatively possible for the bulb to have a portion of different shape, for example a parabolic portion or an ellipsoidal portion. The bulb may have a mirroring coating, or alternatively, for example, an IR-reflecting coating for throwing back IR radiation onto the incandescent body.

It is favorable when the moulded plate has an unround edge which projects outside the bulb. The edge may then serve to allow a holder for the lamp, for example a carrier against which the lamp is provided, to grip the lamp. The unround shape of the edge may in that case indicate where the current conductors issue from the plate to the exterior. The unround edge may also serve to position the incandescent body with respect to said edge in directions parallel to the plate. It is favorable when the edge has mutually opposed flat sides. Such flat sides are highly effective for the above purposes and can yet be realized in a simple manner. They may also serve to prevent that a lamp, for example mounted against a carrier, can rotate relative to this carrier.

It is favorable for protecting the environment when the glass of the bulb and of the moulded plate is at least substantially free from lead. Lead-free glass suitable for the lamp is known, for example, from US-A-5,470,805, and has a composition of substantially: SiO_2 60-72; Al_2O_3 1-5; Li_2O 0.5-1.5; Na_2O 5-9; K_2O 3-7; MgO 1-2; CaO 1-3; SrO 1-5; BaO 7-11; rest <0.5 % by weight. Such a glass has a coefficient of linear thermal expansion between 25 and 480 °C of approximately $11 \times 10^{-6} \text{ }^\circ\text{C}^{-1}$. The glass is highly

suitable for use in combination with current conductors and with a metal tube of, for example, a nickel-iron alloy. Alternatively, the lamp vessel may be made from hard glass or quartz glass, especially if the filling gas comprises a halogen or halogen compound.

5 It is favorable when the sintered plate is plane at its surface facing away from the bulb. This surface may be mounted against a holder, for example a carrier, and accordingly is a suitable surface for serving as a reference for the position of the incandescent body. The surface of the plate which faces the incandescent body has a central elevation in a favorable embodiment, which serves to center the bulb with respect to the plate during lamp manufacture, but which is also useful for positioning a previously shaped ring of
10 enamel material.

In a favorable embodiment, the sintered glass plate has a surface facing the bulb which is wider than a surface facing away from the bulb. The glass plate then has a conically shaped side surface and is then self-locating when the lamp is placed in a holder.

The electric incandescent lamp according to the invention in general
15 consumes a power of approximately 5 to 25 W at a voltage of 13.5 V. The lamp can have a useful life of at least 2000 h against a luminous efficacy of 18 lm/W.

An embodiment of the electric incandescent lamp according to the invention is shown in the drawing, in which:

20 Fig. 1 shows the lamp in side elevation;

Fig. 2 shows the lamp on an enlarged scale, without coating, in side elevation;

Fig. 3 shows the sintered plate as viewed along the line III in Fig. 2; and

25 Fig. 4 shows the distribution of the luminous intensity of the lamp.

In Figs. 1 and 2, the electric incandescent lamp has a moulded plate 1 of glass which is connected in a gastight manner to current conductors 2 and to a metal tube 3 which are passed through said plate. An incandescent body 4 is connected to the current
30 conductors 2 and occupies a previously defined position relative to the moulded plate 1. A glass bulb 5 is placed over the incandescent body 4 and is connected to the moulded plate in a gastight manner by means of enamel 6. A filling gas with a pressure of at least 1 bar is present in the bulb 5. The metal tube 3 has a gastight seal 30 outside the bulb 5.

The glass plate 1 is a sintered body having a composition which

corresponds to the composition of the glass of the bulb 5. In the drawing, the glass composition is substantially: SiO_2 67.59; Al_2O_3 3.56; Li_2O 1.27; Na_2O 7.38; K_2O 4.88; MgO 1.24; CaO 1.89; SrO 3.04; BaO 8.81; CeO_2 0.12; SO_3 0.17; rest 0.05 % by weight. The glass of the bulb 5 and the glass of the moulded plate 1 are at least substantially free from lead.

The filling gas has a pressure of 2 to 15 bar at room temperature, in general from 2 to 8 bar, in particular a pressure from 3 to 5 bar, and comprises Xe, Kr, or a mixture thereof, in the Figure krypton to a pressure of 5 bar. The filling gas may comprise a few % of N_2 by volume, and possibly halogen or a halogen compound.

A water vapor getter 20 is present in the bulb 5, in the drawing in the form of a coating on both current conductors 2. The getter is formed by a powder coating of ZrAl , but it may alternatively comprise a coating of, for example, ZrPd .

The seal 30 of the metal tube 3 is a solidified molten metal, in the Figure a drop originating from an end portion of the tube 3 which was melted by means of a discharge arc.

The incandescent body 4 is connected to the current conductors 2 by means of a solidified molten metal 21, in Fig. 2 in that the second part 23 of the current conductor 2 was made to melt locally by means of a laser.

In the drawing, the current conductors 2 each have a weld adjacent the plate 1 between a first part 22 of the conductor which is made of a first metal, for example a nickel-iron-chromium alloy, and which enters the bulb 5 through the moulded plate 1, and a second part 23 made of a second metal and extending towards the incandescent body 4. In Fig. 2, the second part is made of Mo, but it may alternatively be made, for example, of MnNi. The two parts are joined together by means of a butt weld.

The bulb 5 has a spherical end portion 50 having a center of curvature 51 and connected to the moulded plate 1 via a cylindrical portion 52 by means of enamel 6. The incandescent body 4 surrounds the center of curvature 51 and is positioned perpendicularly to the plate 1 so as to coincide with the axis 54 of the bulb 5.

The cylindrical portion 52 and an adjoining portion of the spherical end portion 50 of the bulb 5 have a white coating 53 in Fig. 1. The coating in the Figure was obtained in that a slurry of TiO_2 , or alternatively ZrO_2 , was applied.

The moulded plate 1, see also Fig. 3, has an unround edge 10 which projects outside the bulb 5. The edge 10 has mutually opposed flat sides 11. The plate has a central elevation 12, which centers the bulb 5, at its surface 13 facing the bulb 5. The

surface 14 of the plate 1 facing away from the bulb 5 is narrower than is the surface 13, so that the plate 1 has a conical side surface and is self-locating when the lamp is placed in a holder or against a carrier. The incandescent body is vertically aligned with respect to the surface 14 of the plate 1 facing away from the bulb 5, and is aligned in directions parallel to the plate 1 with respect to the flat sides 11.

The lamp is of high quality, as regards accuracy, life, and lumen maintenance, and as regards a highly reliable gastightness. In addition, it is very compact, having a greatest diameter of approximately 16 mm, and a distance of less than 20 mm from the bulb to the outside of the plate.

In Fig. 4, curve a represents the light intensity distribution of a 15 W lamp having a clear bulb, and curve b the same distribution for the same lamp, but provided externally with a diffusely reflecting ZrO_2 layer as shown in Fig. 1. The lamp was in the position shown, with the incandescent body in the center of the diagram, during the measurements.

Curve a shows that the lamp having the clear bulb throws practically as much light obliquely forward as obliquely to the rear, where it is in general useless. It is also apparent that the lamp only has a low luminous intensity of approximately 4 cd in a direction straight ahead.

It is apparent from curve b that the coated lamp radiates substantially no light any more to the rear, over the boundary of the coating. Practically all light is radiated obliquely forward, where especially the directions farther ahead benefit from the coating. The intensity has risen to 12 cd in the direction straight forward.

CLAIMS:

1. An electric incandescent lamp comprising:
a moulded glass plate (1) which is connected in a gastight manner to
current conductors (2) and to a metal tube (3) which extend through said plate;
an incandescent body (4) occupying a predetermined position relative to
5 the moulded plate (1) and connected to the current conductors (2);
a glass bulb (5) around the incandescent body (4), connected in a gastight
manner to the moulded plate (1) by means of enamel (6);
a filling gas having a pressure of at least 1 bar inside the bulb (5),
said metal tube (3) having a gastight seal (30) outside the bulb (5),
10 characterized in that the glass plate (1) is a sintered body which has a
composition which corresponds to the composition of the glass of the bulb (5).
2. An electric incandescent lamp as claimed in claim 1, characterized in that
the filling gas has a pressure of 2 to 15 bar at room temperature and comprises Xe, Kr, or a
mixture thereof, which may comprise N₂.
- 15 3. An electric incandescent lamp as claimed in claim 2, characterized in that
a water vapor getter (20) is present in the bulb (5).
4. An electric incandescent lamp as claimed in claim 3, characterized in that
the water vapor getter (20) is a coating on at least one of the current conductors (2).
5. An electric incandescent lamp as claimed in claim 1, 2 or 3,
20 characterized in that the seal (30) of the metal tube (3) is a solidified molten metal.
6. An electric incandescent lamp as claimed in claim 1, 2 or 3,
characterized in that the incandescent body (4) is connected to the current conductors (2) by
means of a solidified molten metal (21).
7. An electric incandescent lamp as claimed in claim 6, characterized in that
25 the current conductors (2) each have a weld adjacent the plate (1) between a first conductor
part (22) which is made from a first metal and which enters the bulb (5) through the moulded
plate (1) and a second part (23) made from a second metal and extending towards the
incandescent body (4).
8. An electric incandescent lamp as claimed in claim 1, 2 or 3,

characterized in that the bulb has a spherical end portion (50) having a center of curvature (51) and connected via a cylindrical portion (52) to the moulded plate (1) by means of enamel (6), the incandescent body (4) surrounding the center of curvature (51).




9. An electric incandescent lamp as claimed in claim 8, characterized in that
5 the cylindrical portion (52) and an adjoining portion of the end portion (50) have a white coating (53).

10. An electric incandescent lamp as claimed in claim 1, 2 or 3,
characterized in that the moulded plate (1) has an unround edge (10) which projects outside
the bulb (5).

10 11. An electric incandescent lamp as claimed in claim 10, characterized in
that the edge (10) has mutually opposed flat sides (11).

12. An electric incandescent lamp as claimed in claim 10 or 11,
characterized in that the plate (1) has a surface (13) facing the bulb (5) which is wider than a
surface (14) facing away from the bulb (5).

15 13. An electric incandescent lamp as claimed in claim 1, characterized in that
the glass of the bulb (5) and of the moulded plate (1) is at least substantially free from lead.

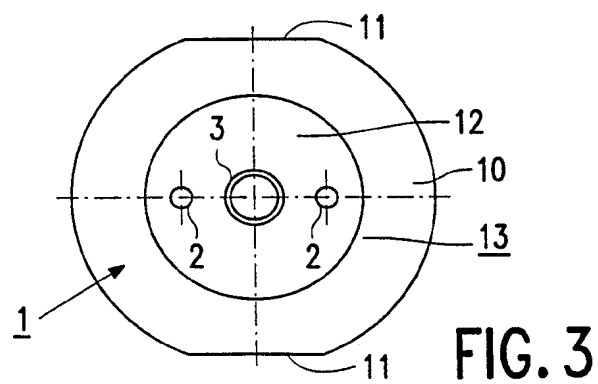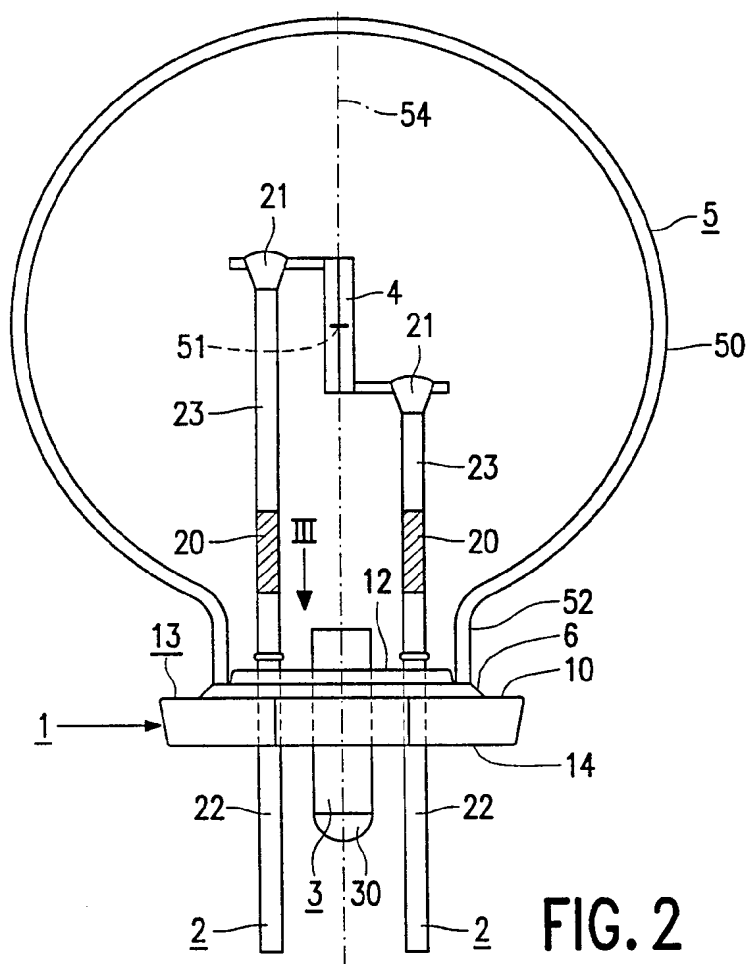

2/2

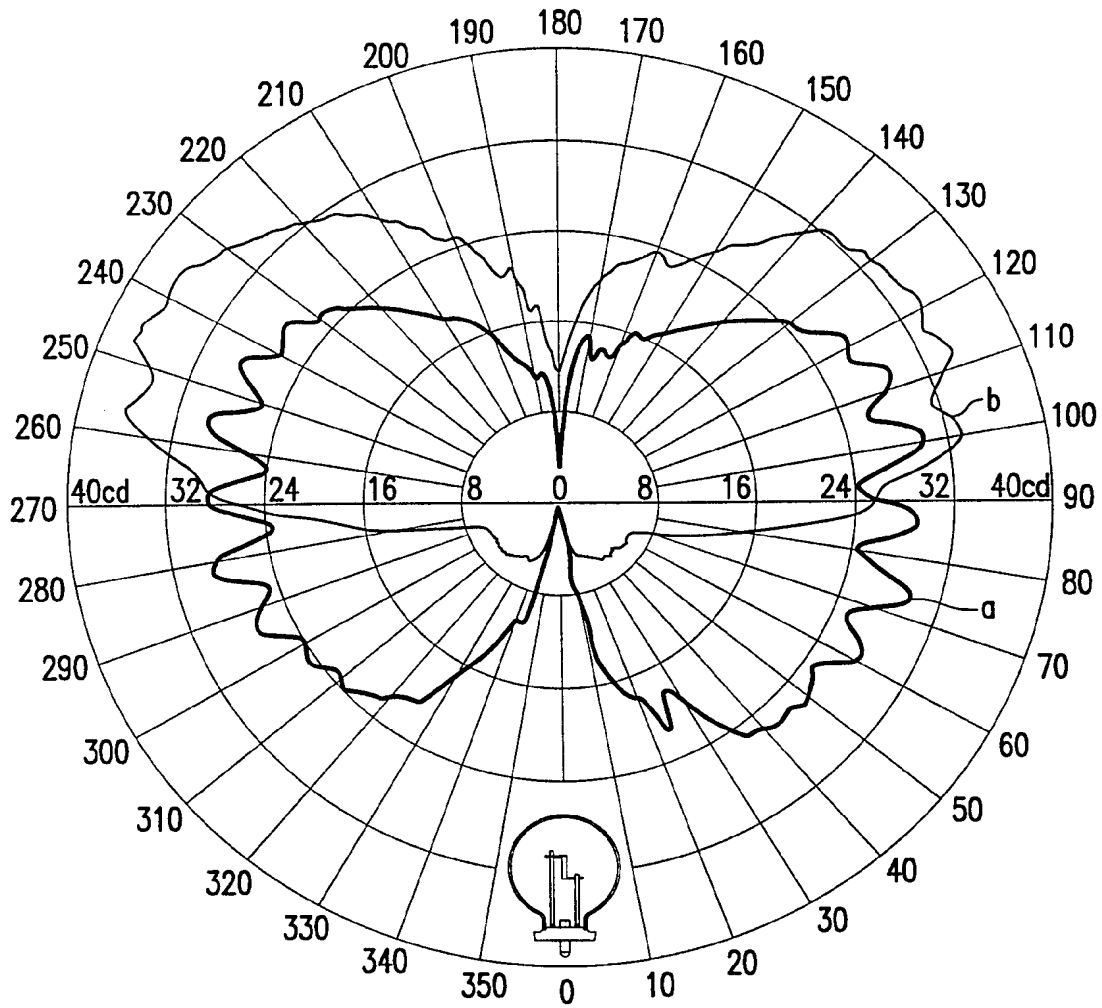


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00668

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01K 1/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
D,A	FR 913579 B (SOCIETE AUTO-LAMPE), 13 Sept 1946 (13.09.46), page 1, line 44 - page 2, line 29 --	1-13
D,A	US 5470805 A (B. FILMER), 28 November 1995 (28.11.95), figure 1, abstract --	1-13
A	US 4208603 A (J.A. GRAVES ET AL.), 17 June 1980 (17.06.80), column 3, line 27 - line 66; column 4, line 48 - column 6, line 10, figures 1,4-6, abstract --	1-13

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

6 October 1998

Date of mailing of the international search report

12 -10- 1998

Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer

Karin Säfsten
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00668

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	DE 19731678 A1 (GENERAL ELECTRIC CO.), 5 February 1998 (05.02.98), page 5, line 9 - line 26, figure 1, abstract --	1-13
A,P	WO 9732338 A1 (ILLUMINATION TECHNOLOGY, INC.), 4 Sept 1997 (04.09.97), page 5, line 3 - page 8, line 19, figure 4, abstract --	1-13
A	Patent Abstracts of Japan, abstract of JP 55-37437 A (TOSHIBA CERAMICS K.K.), 15 March 1980 (15.03.80) -- -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/07/98

International application No.

PCT/IB 98/00668

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
FR	913579	B	13/09/46	NONE	
US	5470805	A	28/11/95	AU 5244993 A BR 9305027 A CA 2111145 A CN 1088895 A DE 69305311 D,T EP 0603933 A,B ES 2094998 T HU 69747 A HU 213843 B HU 9303566 D JP 6206737 A MX 9307816 A PL 301410 A SG 44912 A	23/06/94 21/06/94 15/06/94 06/07/94 24/04/97 29/06/94 01/02/97 28/09/95 28/11/97 00/00/00 26/07/94 31/08/94 27/06/94 19/12/97
US	4208603	A	17/06/80	BR 8000783 A DE 3000056 A DE 3050515 A FR 2448788 A,B GB 2042800 A,B JP 55105957 A	21/10/80 14/08/80 16/09/82 05/09/80 24/09/80 14/08/80
DE	19731678	A1	05/02/98	HU 9602087 D	00/00/00
WO	9732338	A1	04/09/97	AU 1964497 A US 5659222 A	16/09/97 19/08/97